

FAE Forestry Mulcher


The FAE Mulcher attachments are versatile machines, ideal for fire prevention, bushfire cleanup, land clearing and general vegetation management. They are available in various sizes with fixed and swinging head options.

Bulkhead for Hydraulic Connections

Belt Transmission

Motor Enclosed in the Frame

Flow Control System Valve

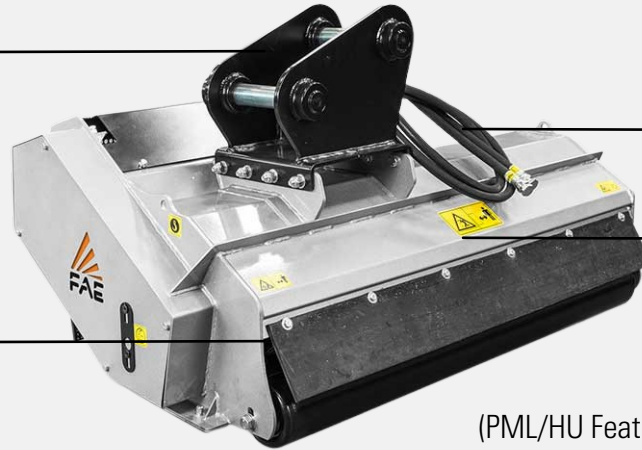

(PML/HU Featured)

KEY FEATURES

- Flow control system valve
- Motor enclosed in the frame
- Belt transmission
- Bulkhead for hydraulic connections
- Front hood with mechanical adjustment

WHAT'S INCLUDED



Hoses

	Unit	PML/HY 90	PMM/HY 125	PML/EX 100	BL1/EX 75	BL2/EX/ST 100	BL2/EX/ST 125
Machine Size	tonne	2.5 - 3.5	4.0 - 5.5	5.5 - 7.5	4 - 7.5	8 - 14	8 - 14
Weight	kg	210	290	320	355	570	625
Oil Pressure	Bar	150 - 210	150 - 210	180 - 210	180 - 350	180 - 350	180 - 350
Flow Rate	LPM	16 - 20	38 - 120	64 - 130	50 - 130	100 - 140	100 - 140
Working Width	mm	900	1256	1016	800	1000	1240
Max Shredding Diameter	mm	20	50	50	120	150	150
Hammer	-	14	20	16	-	-	-
No. of Flails	Y/2	14	20	16	-	-	-
No. of Blades	Mini BL	-	-	-	14	18	22